


BR2111

Copper
Cobre
Miedź
Cobre
Cuivre



Minimum electrical conductivity of 57 M/Ohms x mm², in an annealed condition. No requirement for weldability.
Conductividad eléctrica mínima de 57 M/Ohms x mm², en estado recocido. Ningún requisito de soldabilidad.

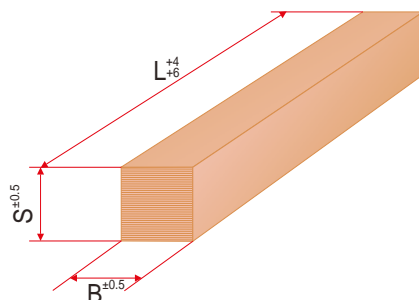

Mat. : Cu 99,9 Min. DIN E-Cu 57 2,0060. ISO CU-ETP.

		L			
B	S	100	300	500	REF.
10	10	*	*	*	BR2111/ 10 x 10 x ...
20	20	*	*	*	BR2111/ 20 x 20 x ...
30	30	*	*	*	BR2111/ 30 x 30 x ...
40	40	*	*	*	BR2111/ 40 x 40 x ...
50	50	*	*	*	BR2111/ 50 x 50 x ...
60	60	*	*	*	BR2111/ 60 x 60 x ...
70	70	*	*	*	BR2111/ 70 x 70 x ...
80	80	*	*	*	BR2111/ 80 x 80 x ...
100	100	*	*	*	BR2111/ 100 x 100 x ...
120	120	*	*	*	BR2111/ 120 x 120 x ...