



BR601




Quick-release coupling
 Enchufe rápido
 Szybkozłącze bez zaworu
 Acoplador rapido
 Coupleur rapide

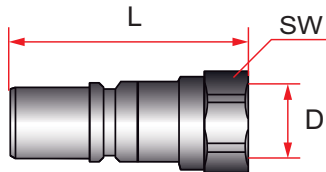

D	L	SW	without valve /sin valvula
			REF.
G 1"	92	41	BR601.20 DR 33
G 1"	100	41	BR601.25 DR 33
G 1"-1/2	110	65	BR601.38 DR 48

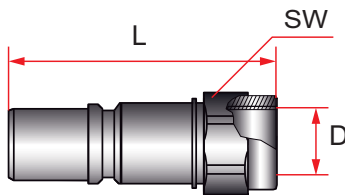

D	L	SW	whit valve/con valvula
			REF.
G 3/4"	126,5	42	BR601.20 DRB 26
G 1"	126,5	42	BR601.20 DRB 33
G 1"	148,5	50	BR601.25 DGB 33
G 1"-1/4	158	50	BR601.25 DRB 42
G 1"-1/2	156	70	BR601.38 DRB 48
G 2"	156	70	BR601.38 DRB 60

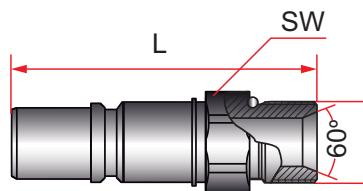

D	L	SW	whit valve/con valvula
			REF.
G 1"	120	42	BR601.20 ERB 33
G 1"	127	50	BR601.25 ERB 33
G 1"-1/4	131,5	50	BR601.25 ERB 42
G 1"-1/2	156	70	BR601.38 ERB 48
G 2"	161	70	BR601.38 ERB 60

BSP Threads - Cylindrical = "G" Conical = "R"

Roscas BSP - Cilindrica = "G" Cónica = "R"

Mat: Brass
 Mat: Latón

O-ring: Viton®
 Junta: Vitón®

Temperature range: -20°C +100°C
 Rango de temperatura: -20°C + 100°C

Working pressure: 16 bar
 Presión de trabajo : 16 bar