

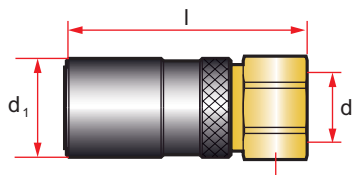
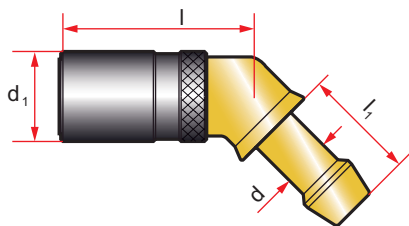
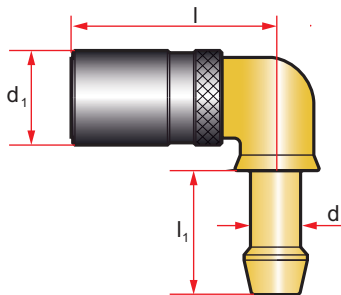


BR601

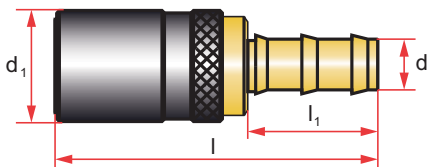

Quick-release coupling
 Enchufe rápido
 Szybkozłącze bez zaworu
 Acoplador rapido
 Coupleur rapide

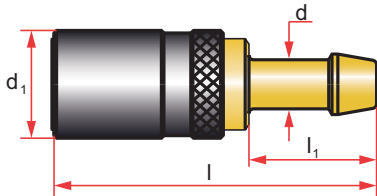

SW

d	d1	l	l1	with valve / con valvula	without valve /sin valvula
				REF.	REF.
8	19	60	23	BR601.06 HGB 08	BR601.06 HG 08
12	25	69,5	28	BR601.09 HGB 12	BR601.09 HG 12
13	31	82	28	BR601.09 HGB 13	BR601.09 HG 13
16	31	82	28	BR601.12 HGB 16	BR601.12 HG 16
16	32	109	28	BR601.16 HGB 16	BR601.16 HG 16
19	38	114	33	BR601.16 HGB 19	BR601.16 HG 19

d	d1	l	l1	with valve / con valvula	without valve /sin valvula
				REF.	REF.
10	19	60	24	BR601.06 FGB 10	BR601.06 FG 10
10	25	69,5	24	BR601.09 FGB 10	BR601.09 FG 10
13	25	69,5	28	BR601.09 FGB 13	BR601.09 FG 13
13	31	92	38	BR601.12 FGB 13	BR601.12 FG 13
16	38	109	38	BR601.16 FGB 16	BR601.16 FG 16
19	38	109	38	BR601.16 FGB 19	BR601.16 FG 19

d	d1	l	l1	with valve / con valvula	without valve /sin valvula
				REF.	REF.
8	19	59	23	BR601.06 HGB 08-90°	BR601.06 HG 08-90°
10	25	60	28	BR601.09 HGB 10-90°	BR601.09 HG 10-90°
12	25	65	28	BR601.09 HGB 12-90°	BR601.09 HG 12-90°
16	31	82	28	BR601.12 HGB 16-90°	BR601.12 HG 16-90°
19	38	132	60	BR601.16 HGB 19-90°	BR601.16 HG 19-90°

d	d1	l	l1	with valve / con valvula	without valve /sin valvula
				REF.	REF.
8	19	59	23	BR601.06 HGB 8-45°	BR601.06 HG 8-45°

d	d1	l	SW	with valve / con valvula	without valve /sin valvula
				REF.	REF.
G 1/4"	19	46	17	BR601.06 DGB 13	BR601.06 DG 13
G 3/8"	25	53	22	BR601.09 DGB 17	BR601.09 DG 17
G 1/2"	31	67	27	BR601.12 DGB 21	BR601.12 DG 21
G 3/4"	38	90	35	BR601.16 DGB 26	BR601.16 DG 26

Mat: Brass
 Mat: Latón

O-ring: Viton®
 Junta: Vitón®

Temperature range: -20°C +100°C
 Rango de temperatura: -20°C + 100°C

Working pressure: 16 bar
 Presión de trabajo : 16 bar