


Reference insert
 Inserto referencia
 Wkładka znakownika recyklingu
 Indicadores de reciclagem
 Pion de recyclage

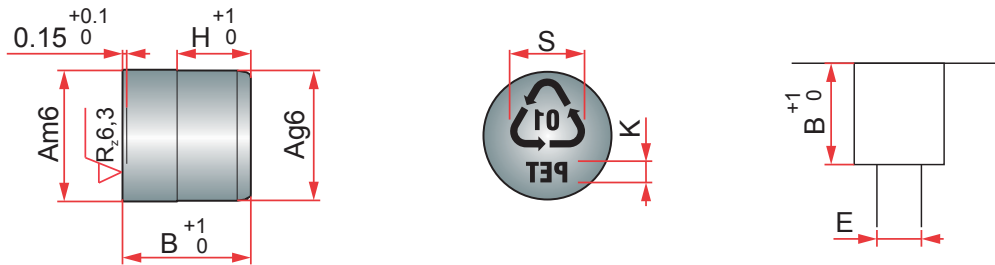

01 02 03 04 05 06 07 (Others)

Mat : INOX. 1.4034. Hardness: 51 ± 3 HRC. Maximum temperature at work: 150° C.

| S | K | E | H | A | B | REF. |
|-------|------|----|---|----|----|--------------------|
| 5,60 | 1,50 | 8 | 7 | 10 | 12 | IR.1012-01 (PET) |
| | | | | | | IR.1012-02 (PE-HD) |
| | | | | | | IR.1012-03 (PVC) |
| | | | | | | IR.1012-04 (PE-LD) |
| | | | | | | IR.1012-05 (PP) |
| | | | | | | IR.1012-06 (PS) |
| | | | | | | IR.1012-07 * |
| 6,80 | 1,80 | 10 | | 12 | | IR.1212-01 (PET) |
| | | | | | | IR.1212-02 (PE-HD) |
| | | | | | | IR.1212-03 (PVC) |
| | | | | | | IR.1212-04 (PE-LD) |
| | | | | | | IR.1212-05 (PP) |
| | | | | | | IR.1212-06 (PS) |
| | | | | | | IR.1212-07 * |
| 9,00 | 2,40 | 12 | 9 | 16 | 16 | IR.1616-01 (PET) |
| | | | | | | IR.1616-02 (PE-HD) |
| | | | | | | IR.1616-03 (PVC) |
| | | | | | | IR.1616-04 (PE-LD) |
| | | | | | | IR.1616-05 (PP) |
| | | | | | | IR.1616-06 (PS) |
| | | | | | | IR.1616-07 * |
| 11,50 | 3,20 | 16 | | 20 | | IR.2016-01 (PET) |
| | | | | | | IR.2016-02 (PE-HD) |
| | | | | | | IR.2016-03 (PVC) |
| | | | | | | IR.2016-04 (PE-LD) |
| | | | | | | IR.2016-05 (PP) |
| | | | | | | IR.2016-06 (PS) |
| | | | | | | IR.2016-07 * |

* Indicate the desired model after the reference.
 * Indiquer le sigle demandé après la référence.
 * Indicar o modelo desejado depois da referência.
 * Indicar el modelo desejado después de la referencia.

